

OpenSSH

Make SSH MPTCP aware



Maxime Beugoms

Antoine Denauw


Alexandre Dubray

Julien Gomez

Julian Roussieau


Our goal

- Use different subflows to share keys
- Switch between subflows during the data transfer

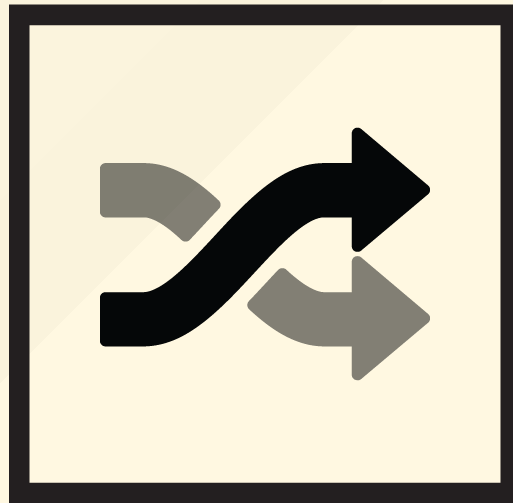

Conclusion ?

- We can switch between subflows 😊

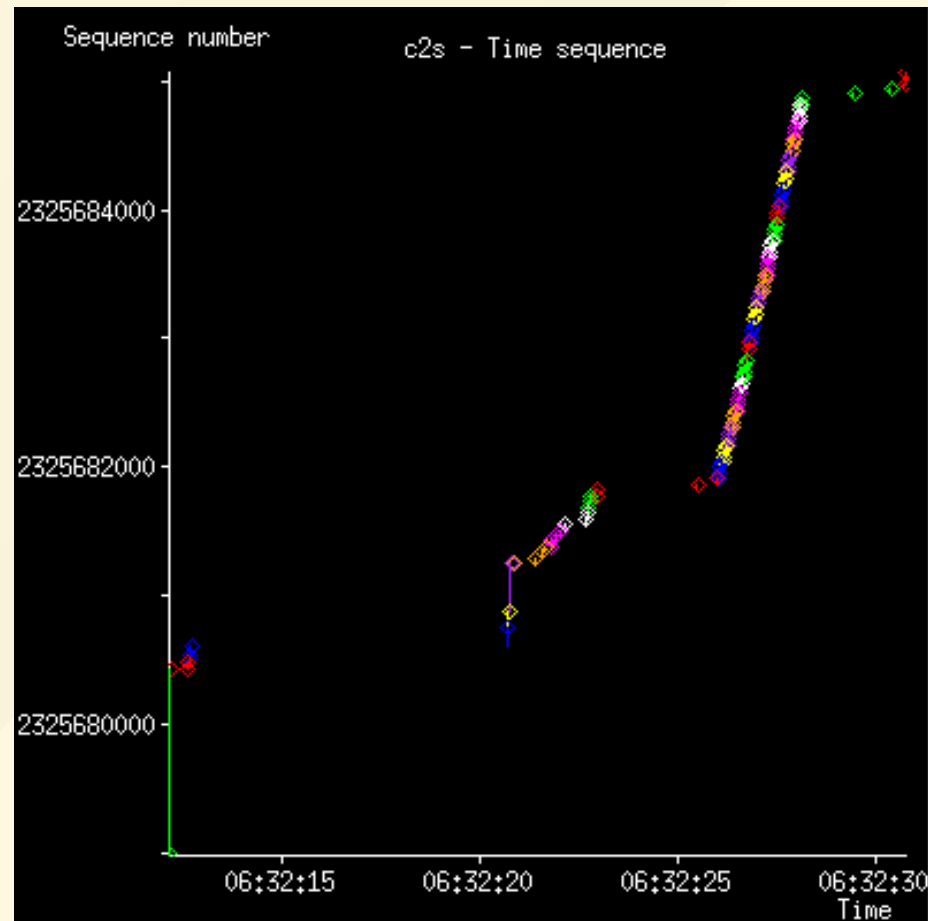

Conclusion ?

- Not able to share keys in its own subflow 😞

Encountered problems

- Some draft issues
 - `MPTCP_CLOSE_SUBFLOW`
- Try to close a subflow when a subflow is not established yet
- `getsockopt()` or `setsockopt()`